


Norpak 1000 ALT Hang Tab Applicator

Do-It Roll Form Hang Tabs are designed for high speed automatic application. Application rates up to 200 per minute can be achieved with the Norpak 1000 ALT Hang Tab Applicator – depending on the product/package shape and size.

- ▶ High Speed Hang Tab Applicator
- ▶ Apply up to 200 hang tabs per minute.
- ▶ Compatible with existing production lines.
- ▶ Easy to set up. Easy to run.

Updated custom web tension unwind roller to suit hang tabs up to 3.70 inches (95mm).

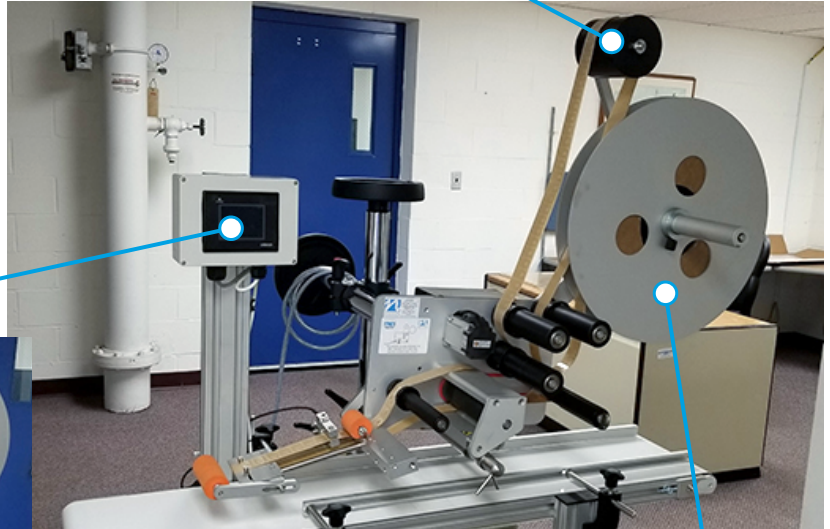

Software and touchscreen control box.

Larger unwind to handle rolls up to 19.0 inches (482.6mm) OD. Updated with new rear-locking mechanism.


Adjustable conveyor speed up to 114 feet (35M) per minute.



Omron servo motor.

Fully adjustable application head – including angle of peel plate (beak).

High-density foam roller to apply pressure to hang tab after placement on product.

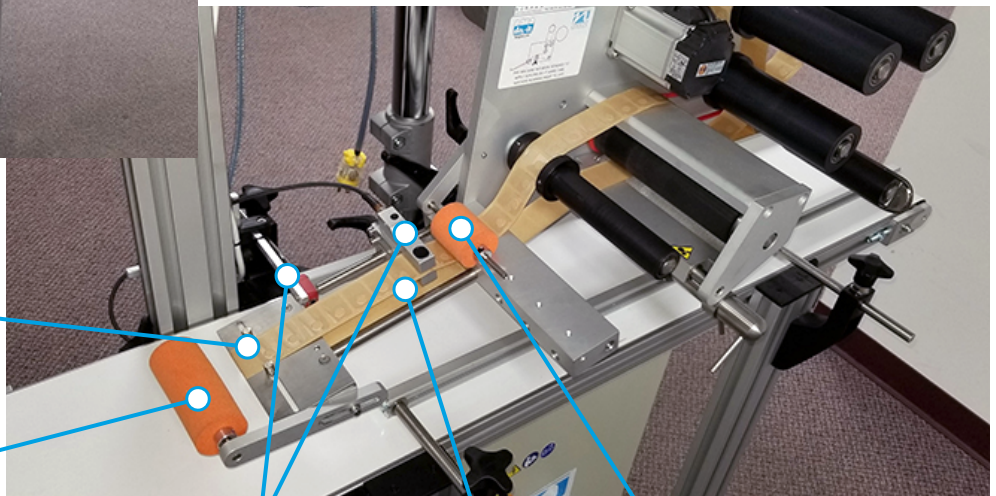

Leuze ultrasonic “self-teaching” sensors.

Smooth web path to the peel plate (beak).

New – additional tension roller.



Do-It Corporation

(800) 426-4822 | (269) 637-1121
 www.hangtab.com | email: sales@do-it.com
 PO Box 592, South Haven, Michigan 49090-0592 USA

